


Ex d IIB+H₂ ALUMINUM AND STAINLESS STEEL ENCLOSURES - EJB... SERIES



ALUMINUM ENCLOSURES

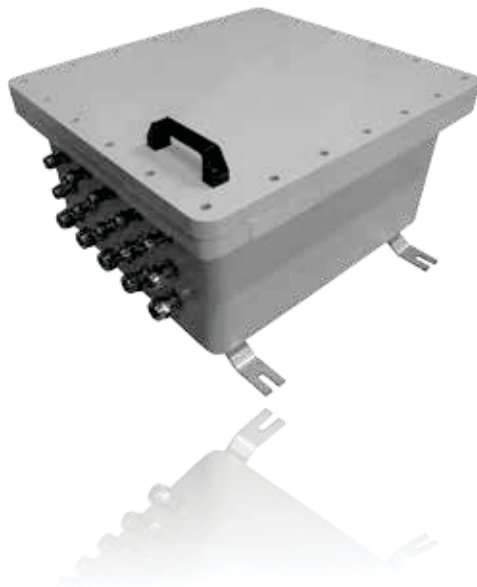

STAINLESS STEEL ENCLOSURES

EJB... series enclosures offer Ex d IIB +H₂ mode of protection.

These enclosures are suitable to be used in hazardous areas for different applications, such as push button stations, instrument housing, lighting distribution panels, power distribution panels, heat tracing panels, motor control panels, etc.

INERIS 14ATEX0002X (ATEX), **IECEX INE 14.0017X** (IECEX), **RU C-ITA.AA87.B.00188** (Tr Cu), **LEC 15.0023 X** (INMETRO) and **CNEx17.1730X** (Chinese Certificate of Conformity).



Address

A.B. Controls & Technology, Inc.
1813 Rotary Drive, Humble, TX, 77338

Web

www.abtech-inc.com

Contacts


Tel: 281-548-3424. Email: sales@abtech-inc.com

EJB SERIES - TECHNICAL SPECIFICATION

MATERIAL

Enclosure material: Copper free aluminum or stainless steel AISI 316L
Lid material: Copper free aluminum

Ex CODE

Ex execution:  II 2 GD
Ex db IIB+H₂ T6/T5/T4 Gb
Ex tb IIIC T85°C / T100°C / T135°C Db IP66






MECHANICAL FEATURES

Degree of protection: IP66
Temperature: -20°C to +60°C or -50°C to +60°C
Threaded Holes: ISO Metric / ANSI B1.20.1 NPT

Ex FEATURES

Standards: EN 60079-0 / EN 60079-1 / EN 60079-11 / EN 60079-31
IEC 60079-0 / IEC 60079-1 / IEC 60079-11 / IEC 60079-31
Suitable for: Zone 1 / Zone 2 / Zone 21 / Zone 22

CERTIFICATES

Certificates Number:  INERIS 14ATEX0002X
 IECEX INE 14.0017X
 RU C-IT.AA87.B.00188
 LEC 15.0023 X
 CNEC17.1730X

NOTE

Enclosures can be internally equipped with intrinsically safe equipment.
Enclosures can be equipped with windows on the cover.
Certificate for Group I available.



Address

A.B. Controls & Technology, Inc.
1813 Rotary Drive,
Humble, TX 77338

Web

www.abtech-inc.com

Contacts

Tel: 281-548-3424. Email: sales@abtech-inc.com

EJB SERIES - ALUMINUM DIMENSIONS

TYPE	External Dimensions			Internal Dimensions			Internal Plate		Fixing Holes		Weight	Feet Fixing Bolts
	Height (H)	Width (W)	Depth (D)	Height (H1)	Width (W1)	Depth (D1)	A	B	T	U	kg	ØZ
EJB-A	315	250	175	230	165	130	215	150	180	241	11	M8
EJB-B	425	245	230	345	170	185	321	150	290	249	16	M8
EJB-C	490	415	260	385	310	200	335	275	336	414	36	M8
EJB-D	530	495	260	425	390	200	394	358	360	480	44	M8
EJB-E	595	540	315	480	430	235	446	391	400	559	80	M10
EJB-F	835	445	315	720	340	235	670	294	630	449	93	M10
EJB-G	835	610	315	720	500	235	670	450	630	604	123	M10
EJB-H	835	610	410	720	500	330	670	450	630	604	134	M10

All dimensions are in mm.

Dimensions and weights are approximate and subject to change without notice.



Address

A.B. Controls & Technology, Inc.
1813 Rotary Drive,
Humble, TX 77338

Web


www.abtech-inc.com

Contacts


Tel: 281-548-3424. Email: sales@abtech-inc.com

EJB SERIES - ALUMINUM DRAWINGS


BOTTOM VIEW

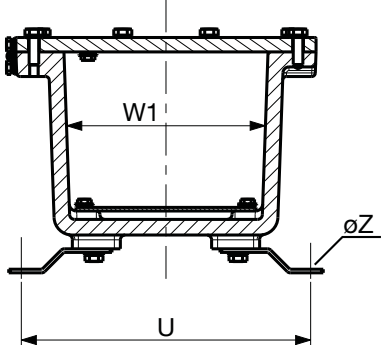


INTERNAL PLATE

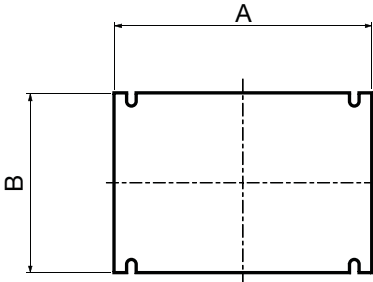

FRONT VIEW

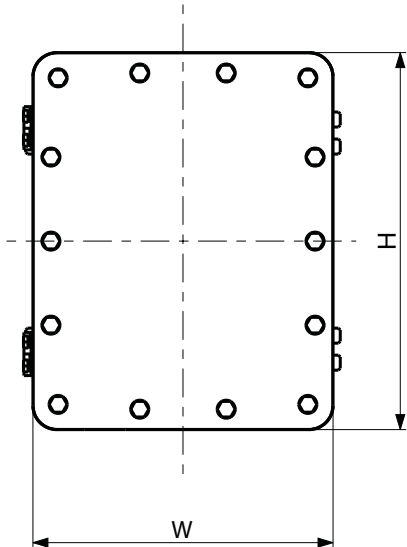

SIDE VIEW

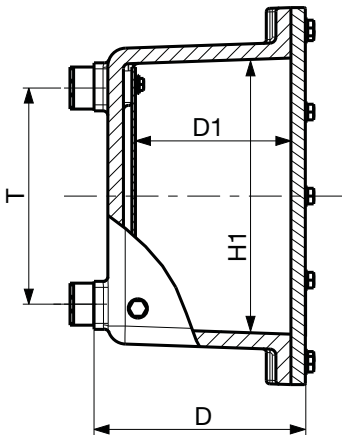

Address

A.B. Controls & Technology, Inc.
 1813 Rotary Drive,
 Humble, TX 77338

Web

www.abtech-inc.com

Contacts

Tel: 281-548-3424. Email: sales@abtech-inc.com

EJB SERIES - STAINLESS STEEL DIMENSIONS

TYPE *	External Dimensions			Internal Dimensions			Internal Plate		Fixing Holes		Weight	Feet Fixing Bolts
	Height (H)	Width (W)	Depth (D)	Height (H1)	Width (W1)	Depth (D1)	A	B	T	U	kg	ØZ
EJBS-A	320	255	182	235	170	140	225	160	175	258	32	M10
EJBS-B	430	255	240	345	170	195	335	160	285	258	42	M10
EJBS-C	490	415	260	390	315	215	380	305	330	403	80	M10
EJBS-D	535	495	260	430	390	215	420	380	370	478	99	M10
EJBS-E	600	545	275	485	430	220	475	420	405	538	144	M16
EJBS-F	845	460	320	725	340	265	715	330	605	450	180	M16
EJBS-G	835	615	315	725	505	263	715	495	605	616	281	M16
EJBS-H	835	615	410	725	505	358	715	495	605	616	309	M16

All dimensions are in mm.

Dimensions and weights are approximate and subject to change without notice.

* "S" discriminate between Stainless Steel and Aluminium enclosures, is not included in the marking.



Address

A.B. Controls & Technology, Inc.
1813 Rotary Drive,
Humble, TX 77338

Web


www.abtech-inc.com

Contacts


Tel: 281-548-3424. Email: sales@abtech-inc.com

EJB SERIES - STAINLESS STEEL DRAWINGS


BOTTOM VIEW

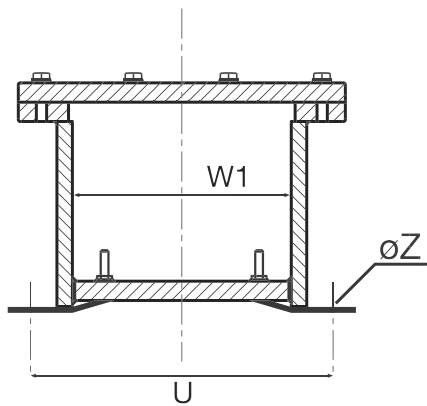


INTERNAL PLATE

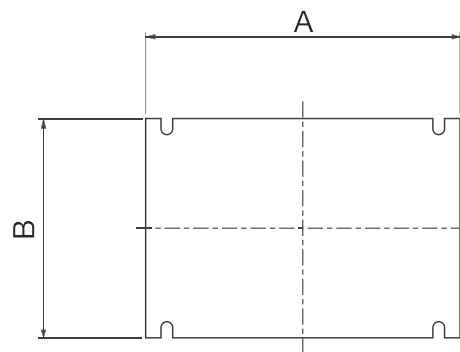

FRONT VIEW

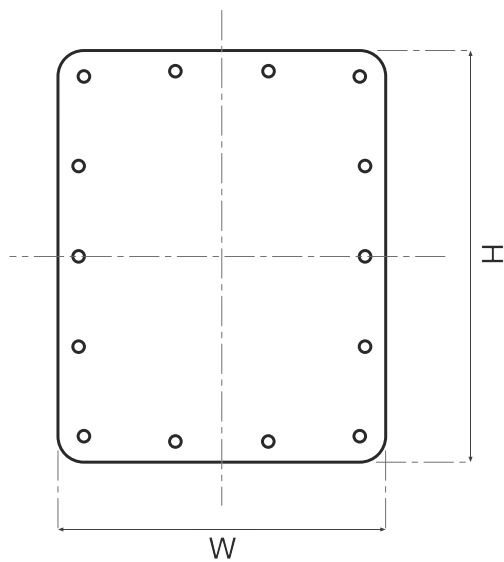

SIDE VIEW

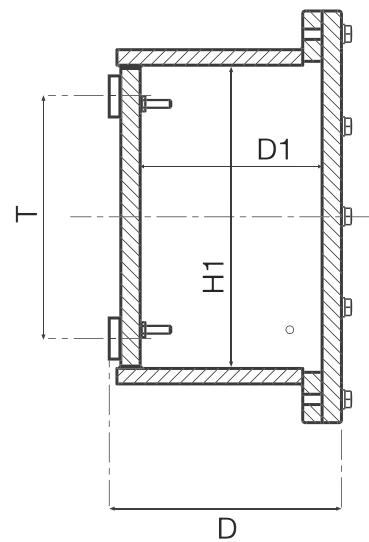

Address

A.B. Controls & Technology, Inc.
1813 Rotary Drive,
Humble, TX 77338

Web

www.abtech-inc.com

Contacts

Tel: 281-548-3424. Email: sales@abtech-inc.com

EJB SERIES - WINDOWS DIMENSIONS AND DRAWINGS


APPLICABLE WINDOWS AND ENTRIES M32X1.5 ON EJB LIDS

Window type	Glass dimensions	EJB-A EJBS-A	EJB-B EJBS-B	EJB-C EJBS-C	EJB-D EJBS-D	EJB-E EJBS-E	EJB-F EJBS-F	EJB-G EJBS-G	EJB-H EJBS-H
P = 80x80	120x120	-	X	X	X	X	X	X	X
Q = 120x120	160x160	-	-	X	X	X	X	X	X
R = 160x160	200x200	-	-	-	X	X	X	X	X
S = 40x70	80x110	-	X	X	X	X	X	X	X
T = 40x200	80x240	-	-	X	X	X	X	X	X
U = 100x270	140x310	-	-	-	-	X	X	X	X

All dimensions are in mm.

Dimensions and weights are approximate and subject to change without notice.

* "S" discriminate between Stainless Steel and Aluminium enclosures, is not included in the marking.

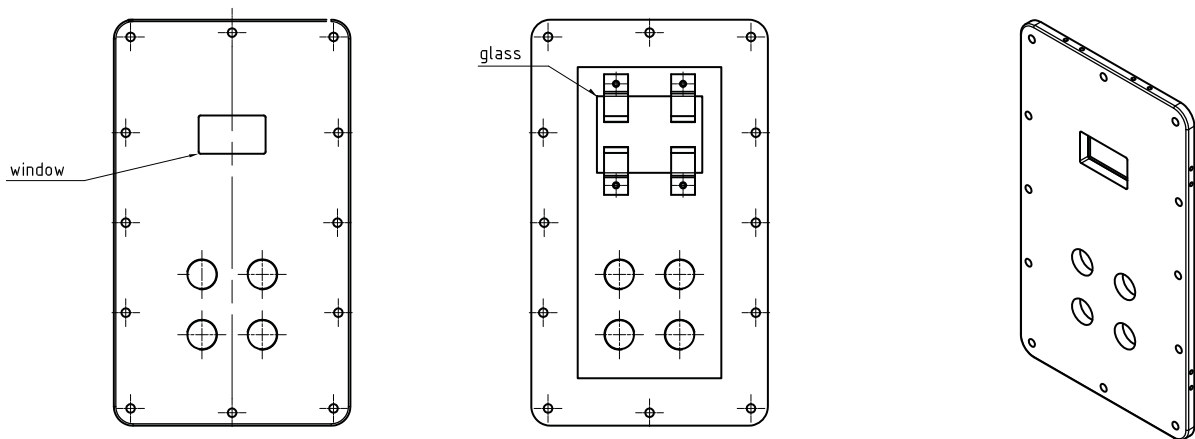

Address

A.B. Controls & Technology, Inc.
1813 Rotary Drive,
Humble, TX 77338

Web

www.abtech-inc.com

Contacts

Tel: 281-548-3424. Email: sales@abtech-inc.com

EJB SERIES - WINDOWS DIMENSIONS AND DRAWINGS


APPLICABLE WINDOWS AND ENTRIES M32X1.5 ON EJB LIDS

Window type	Glass dimensions	EJB-A EJBS-A	EJB-B EJBS-B	EJB-C EJBS-C	EJB-D EJBS-D	EJB-E EJBS-E	EJB-F EJBS-F	EJB-G EJBS-G	EJB-H EJBS-H
V = Ø 120	Ø 160	-	-	X	X	X	X	X	X
W = Ø 160	Ø 200	-	-	-	X	X	X	X	X
X = Ø 180	Ø 220	-	-	-	-	X	X	X	X

All dimensions are in mm.

Dimensions and weights are approximate and subject to change without notice.

* "S" discriminate between Stainless Steel and Aluminium enclosures, is not included in the marking.

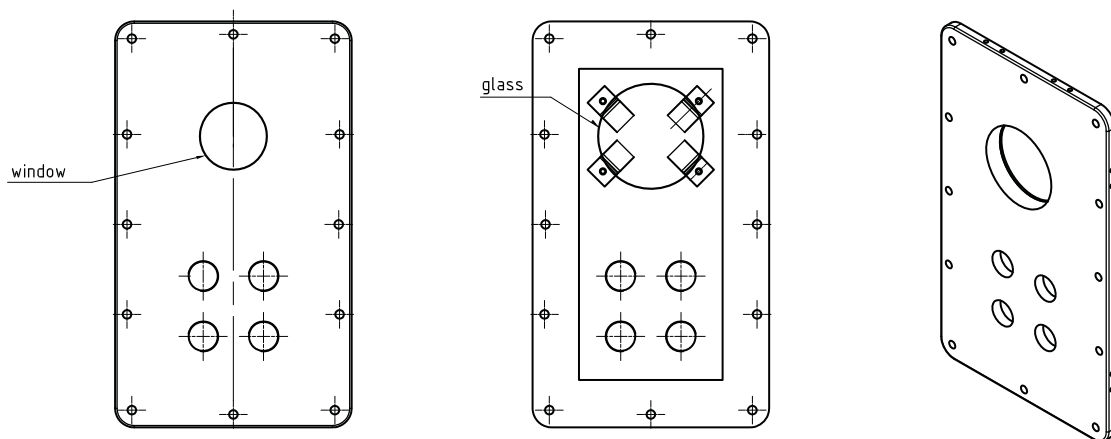

Address

A.B. Controls & Technology, Inc.
1813 Rotary Drive,
Humble, TX 77338

Web

www.abtech-inc.com

Contacts

Tel: 281-548-3424. Email: sales@abtech-inc.com

EJB... SERIES - FEATURES

TYPES OF ENCLOSURES	TEMPERATURE CLASS		MAXIMUM POWER DISSIPATED		
	GAS	DUST	40°C	50°C	60°C
EJB-A	T6	T85°C	90W	60W	25W
	T5	T100°C	120W	95W	75W
	T4	T135°C	205W	180W	155W
EJB-B	T6	T85°C	125W	90W	55W
	T5	T100°C	180W	145W	110W
	T4	T135°C	305W	270W	235W
EJB-C	T6	T85°C	210W	150W	95W
	T5	T100°C	295W	235W	180W
	T4	T135°C	500W	440W	380W
EJB-D	T6	T85°C	255W	185W	115W
	T5	T100°C	360W	290W	220W
	T4	T135°C	610W	535W	465W
EJB-E	T6	T85°C	265W	200W	125W
	T5	T100°C	390W	315W	240W
	T4	T135°C	655W	580W	505W
EJB-F	T6	T85°C	350W	265W	165W
	T5	T100°C	515W	415W	315W
	T4	T135°C	850W	755W	660W
EJB-G	T6	T85°C	410W	315W	195W
	T5	T100°C	610W	495W	375W
	T4	T135°C	1020W	905W	790W
EJB-H	T6	T85°C	510W	390W	245W
	T5	T100°C	610W	460W	320W
	T4	T135°C	1260W	1120W	975W



Address

A.B. Controls & Technology, Inc.
1813 Rotary Drive,
Humble, TX 77338

Web

www.abtech-inc.com

Contacts

Tel: 281-548-3424. Email: sales@abtech-inc.com

EJB... SERIES - FEATURES

NUMBER OF THREADED HOLES AND OPERATORS ON FRONT

EJB Type		A	B	C	D	E	F	G	H
Nr. of threaded holes and operators (M32 and M25) - with windows	min	-	4	8	12	18	35	56	56
	max	-	6	12	18	24	40	64	64
Nr. of threaded holes and operators (M32 and M25) - without windows		4	10	24	36	42	55	88	88

NUMBER OF CABLE ENTRIES ON LONG/SHORT SIDE FOR EACH EJB

ENTRY	BOX TYPE							
	A	B	C	D	E	F	G	H
M20 / 1/2"	8/6	12/6	20/16	24/22	30/24	55/26	55/32	60/38
M25 / 3/4"	8/4	8/4	12/9	22/16	25/20	38/18	40/22	44/24
M32 / 1"	3/3	3/2	10/8	11/9	13/11	30/15	34/18	36/20
M50 / 1.1/2"	2/1	2/1	4/3	8/8	8/8	14/6	16/12	17/13
M63 / 2"	1/1	2/1	3/2	3/3	4/4	10/4	11/5	12/6
M75 / 2.1/2"			2/2	2/2	3/2	4/2	6/4	6/4
M80 / 3"				1/1	2/2	3/1	5/3	5/3



Address

A.B. Controls & Technology, Inc.
1813 Rotary Drive,
Humble, TX 77338

Web

www.abtech-inc.com

Contacts

Tel: 281-548-3424. Email: sales@abtech-inc.com

EJB... SERIES - OPERATORS

CODE	DESCRIPTION
10000	Black button M25 NO contact
10001	Green button M25 NO contact
10002	Red button M25 NC contact
10003	Yellow button M25 NO contact
10004	White signal lamp M25
10005	Green signal lamp M25
10006	Red signal lamp M25
10007	Orange signal lamp M25
10020	Emergency Red button, turn to unlock, M25 1 NC contact
10021	Selector 0-1, M25, 2 pole 16A handle 55x55
10022	Selector 0-1, M25, 3 pole 63A handle 72x72
10023	Switch 1-0-2, M25, 2 pole 16A handle 55x55
10024	Diverter 1-2-3, M25, 2 pole 16A 55x55
10025	Switch 1-0-2, M25, 55x55



Emergency Red button



Green button



Orange signal lamp



Selector 0-1



Address

A.B. Controls & Technology, Inc.
1813 Rotary Drive,
Humble, TX 77338


Web

www.abtech-inc.com

Contacts

Tel: 281-548-3424. Email: sales@abtech-inc.com

EJB... SERIES - EXAMPLE OF EJB WITH WINDOW AND OPERATORS

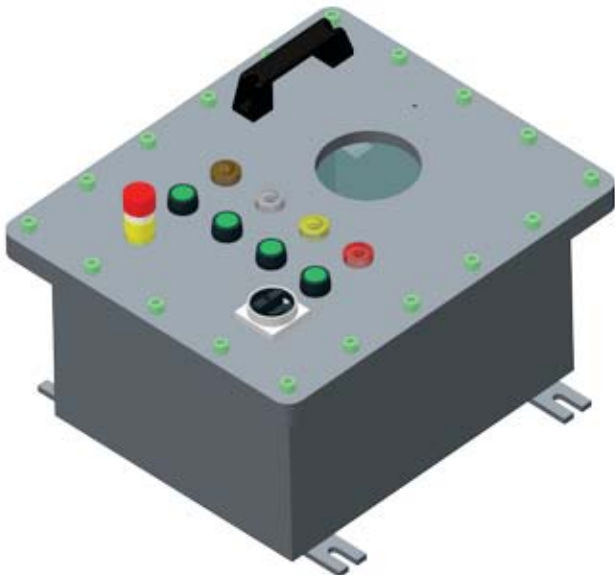

EJB with round window and operators



EJB with square window and operators



.....
Address

.....
A.B. Controls & Technology, Inc.
1813 Rotary Drive,
.....
Humble, TX 77338

.....
Web

.....
www.abtech-inc.com

.....
Contacts

.....
Tel: 281-548-3424. Email: sales@abtech-inc.com
.....