


Nimbus Panel Luminaire

 IP44

The Nimbus is a low-profile LED panel. It provides a significant space and energy saving over a traditional T8 recessed fluorescent.

Key Features:

- Excellent uniformity and colour rendering
- Dimmable (Push to dim)
- Emergency version with battery status/fault condition indicator
- 5-year complete system warranty*

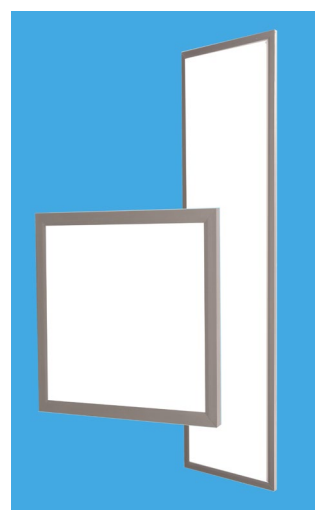

Luminaire Ratings

Product Reference	Dimensions (mm)	Power (W)	Lumen Output (lm)	Ambient Temperature	Weight inc. Driver (Kg) Std / Em
LX2NIM05LB57	150 x 150	6W	730	-20°C to +45°C	3.6 / 9.6
LX2NIM051LB57xx**	200 x 350	12W	1,460	-20°C to +45°C	4.7 / 10.7
LX2NIM11LB57	300 x 300	12W	1,460	-20°C to +45°C	5.2 / 11.2
LX2NIM125LB57	275 x 600	18W	2,100	-20°C to +45°C	6.8 / 12.8
LX2NIM12LB57	300 x 600	18W	2,100	-20°C to +45°C	7.2 / 16.2

Add **E** to the coding for Emergency version e.g. LX2NIM**E**11LB57, standard is the 3-hour version.


Standard Specifications

Luminaire Type	LED panel luminaire
Ingress Protection	IP44 Panel, IP66 Driver to EN60529
Material	Panel: Aluminium frame, PMMA diffuser / Driver: Aluminium enclosure
Lamp Type	Light emitting diode, pure white (4000K)
LED Life	50,000 hours L ₇₀ @ 25°C
Colour Rendering Index	CRI 80
Installation Connections	3.5m flying lead from driver to panel. Cable is fire retardant LSZH to IEC 60331-21 & 31, IEC 60754-1 and IEC 61034-2
Control Gear	Electronic driver: EN60601-1 (CE), EN61204-3 (EMC), EN61000-4-5 (Surge Protection Class 3)
Dimming	Push to dim: 100% > 75% > 50% > Off
Mounting	Via removable 40mm M4 studs secured on to back plate
Supply	220V to 254V 50/60Hz ac
Emergency Duration	90 minutes at 50% output or 180 minutes at 25% output
Battery	6V 4.5Ah Ni-Cd
Area Classification	Zone 2 Gas
Type of Protection	Panel – Ex ic (intrinsically safe) Driver – Ex ec ib q (increased safety, intrinsically safe, sand filled)
Apparatus Coding	Panel – Ex ic IIC T4 Gc Driver – Ex ec [ic Gc] qc IIC T4 Gc
Certificate Number	CML 16ATEX4300X / IECEx CML 16.0020X

* Warranty excludes batteries for emergency version. ** Supplied as Running Man Exit Sign – add suffix.

Product design and specifications are subject to change without notice; please check the website for latest specifications

Luminaire Dimensions

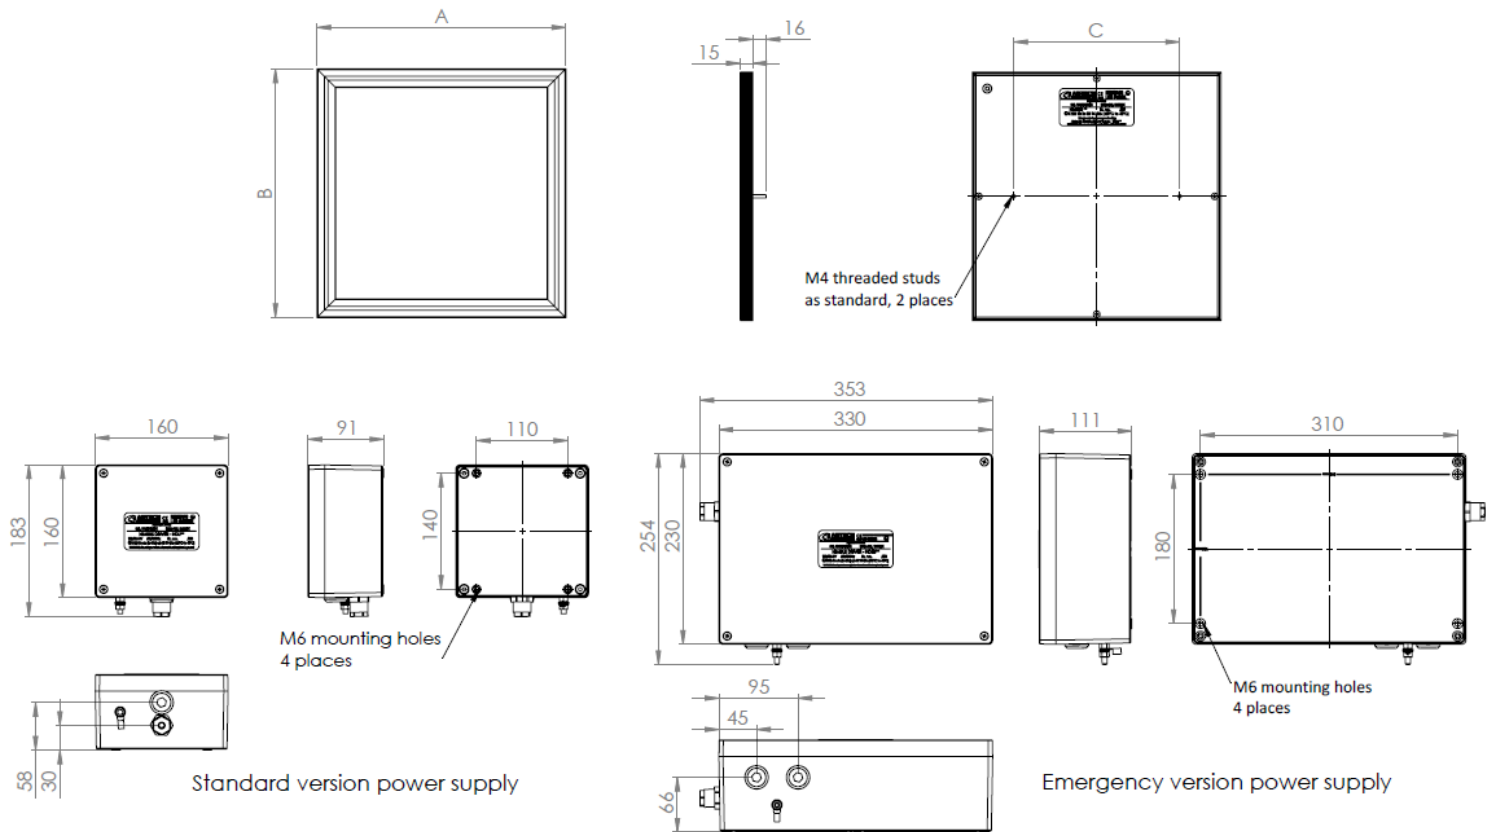

	NIMBUS05	NIMBUS051	NIMBUS11	NIMBUS125	NIMBUS12
A	150	300	300	275	300
B	150	150	300	600	600
C	75	200	200	400	400

Options

E90	90-minute emergency duration (90 minutes at 50% output)
RMD	Running Man decal with down arrow (NIME051 only)
RML	Running Man decal with left arrow (NIME051 only)
RMR	Running Man decal with right arrow (NIME051 only)

Add the required suffix to the product reference.

Example: **LX2NIM051LB57RMD** = Zone 2, 12W panel with Running Man Down Arrow decal

Control Enclosure Mounting Feet (LX4NIM-EMF)



Set of four stainless steel mounting feet with fixings for attaching to control gear enclosure.